


SNP30-VF-1/SNP30-IF-1/
SNP30-VF-2

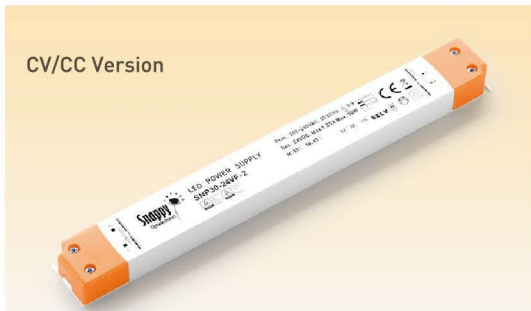


Reliable Technical Data

- Rated Input Voltage:200-240VAC
- Input Frequency:50/60Hz
- Output Power:30W
- Body: PC
- Open Circuit; Short Circuit; Over Load;
- Over Heat Protection

- Safety According to EN61347-1, EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2; EN61000-3-3; EN61547
- EMF According to EN62493-2010
- ERP According to EN1194-2012



Dimension in mm

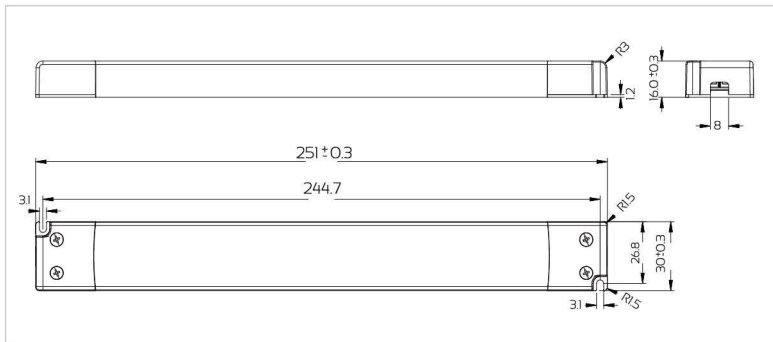

Characteristics

Rated input voltage: AC200-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output current	PF	Ta	Tc	L x W x H
SNP30-12VF-1	12V	0-30W	2.5A	≥0.9	45°C	80°C	251x30x16
SNP30-24VF-1	24V	0-30W	1.25A	≥0.9	45°C	80°C	251x30x16
SNP30-12VF-2	12V	0-30W	2.5A	≥0.9	45°C	80°C	251x30x16
SNP30-24VF-2	24V	0-30W	1.25A	≥0.9	45°C	80°C	251x30x16

Model No.	Constant output current	Load	Output voltage range	PF	Ta	Tc	L x W x H
SNP30-350IF-1	350mA	15-30W	43-86VDC	≥0.9	50°C	80°C	251x30x16
SNP30-500IF-1	500mA	15-30W	30-60VDC	≥0.9	50°C	80°C	251x30x16
SNP30-700IF-1	700mA	15-30W	21-43VDC	≥0.9	50°C	80°C	251x30x16
SNP30-1050IF-1	1050mA	15-30W	14-29VDC	≥0.9	50°C	80°C	251x30x16
SNP30-1400IF-1	1400mA	15-30W	11-22VDC	≥0.9	50°C	80°C	251x30x16

